3813 Res'd PCT/PTO 2 9 MAR 2001

GNATED/ELECT CERNING A FILINAPPLICATION NO. E 99/03014 ON Structing a data connectructing a data connectructing a data connectruction of an	R TO THE UNITED STATES TED OFFICE (DO/EO/US) NG UNDER 35 U.S.C. 371 INTERNATIONAL FILING DATE SEPTEMBER 28, 1999 Rection between an integrated household control syste	U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 09/806356 PRIORITY DATE CLAIMED OCTOBER 26, 1998 nold control system and a data terminal, and			
CERNING A FILINAPPLICATION NO. E 99/03014 ON Structing a data connect remote control of an R DO/EO/US	NG UNDER 35 U.S.C. 371 INTERNATIONAL FILING DATE SEPTEMBER 28, 1999 section between an integrated househ	09/806356 PRIORITY DATE CLAIMED OCTOBER 26, 1998 nold control system and a data terminal, and			
CERNING A FILINAPPLICATION NO. E 99/03014 ON Structing a data connect remote control of an R DO/EO/US	NG UNDER 35 U.S.C. 371 INTERNATIONAL FILING DATE SEPTEMBER 28, 1999 section between an integrated househ	PRIORITY DATE CLAIMED OCTOBER 26, 1998 nold control system and a data terminal, and			
E 99/03014 ON structing a data conne r remote control of an	SEPTEMBER 28, 1999 section between an integrated househ	OCTOBER 26, 1998 nold control system and a data terminal, and			
ON structing a data conne r remote control of an R DO/EO/US	ection between an integrated househ	old control system and a data terminal, and			
structing a data conne r remote control of an R DO/EO/US					
r remote control of an					
I TITLE					
1 1 1 1 1 TT 11 11 11 11 11 11 11 11 11					
	-	(S) the following items and other information:			
	f items concerning a filing under 35 U.S.C.				
	QUENT submission of items concerning a	_			
This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).					
er Demand for Internation	onal Preliminary Examination was made by	y the 19th month from the earliest claimed priority date			
y of the International App	plication as filed (35 U.S.C. 371 (c) (2))				
is transmitted herewith	th (required only if not transmitted by the I	International Bureau).			
has been transmitted b	by the International Bureau.				
c. is not required, as the application was filed in the United States Receiving Office (RO/US).					
A translation of the International Application into English (35 U.S.C. 371(c)(2)).					
A copy of the International Search Report (PCT/ISA/210).					
Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))					
a. are transmitted herewith (required only if not transmitted by the International Bureau).					
have been transmitted	d by the International Bureau.				
•	however, the time limit for making such an	nendments has NOT expired.			
have not been made as					
A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).					
h or declaration of the in	nventor(s) (35 U.S.C. 371 (c)(4)).				
	eliminary Examination Report (PCT/IPEA/4	•			
slation of the annexes to S.C. 371 (c)(5)).	the International Preliminary Examination	Report under PCT Article 36			
below concern docume	ent(s) or information included:				
An Information Disclosure Statement under 37 CFR 1.97 and 1.98.					
An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.					
A FIRST preliminary amendment.					
A SECOND or SUBSEQUENT preliminary amendment.					
A substitute specification.					
	A change of power of attorney and/or address letter.				
=	Certificate of Mailing by Express Mail				
nge of power of attorney	Other items or information:				
:d	formation Disclosure States for the second section of the second section of the second section. The second section is the second section of the second section of the second section of the section of th	formation Disclosure Statement under 37 CFR 1.97 and 1.98. ignment document for recording. A separate cover sheet in compliance of ST preliminary amendment. COND or SUBSEQUENT preliminary amendment. it it is specification. The specification of power of attorney and/or address letter. it is cate of Mailing by Express Mail			

PCTUS1/REV03

U.S. APPLICATION NO. (II	KNOWN, SEE 37 CFR	INTERNATIONAL APPLICATION NO. PCT/DE 99/03014		ATTORNEY'S DOCKET NUMBER 1504		
	g fees are submitted:.	FC1/DE 99/03014				
	E (37 CFR 1.492 (a) (1) -	(5)) •			CALCULATIONS	PTO USE ONLY
	been prepared by the EPO	` ''	\$930.0	0		
	ninary examination fee pai	d to USPTO (37 CFR 1.482)	\$720.00			
☐ No international pr	eliminary examination fee	paid to USPTO (37 CFR 1.482 7 CFR 1.445(a)(2))	• • • • • •	0		
Neither internation international search	al preliminary examination fee (37 CFR 1.445(a)(2)	n fee (37 CFR 1.482) nor	\$1,070.0	0		
☐ International prelim	ninary examination fee pai	d to USPTO (37 CFR 1.482)	\$98.0			
	-	ATE BASIC FEE AM	OUNT =		\$1,000.00	
Surcharge of \$130.00 for f	urnishing the oath or decla	ration later than \Box 2	20 🗆 3	0		
months from the earliest cl	laimed priority date (37 C	FR 1.492 (e)).	T		\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATI		¢0.00	
Fotal claims	17 - 20 =	0	x \$18.0 x \$80.0		\$0.00 \$0.00	
Independent claims	2 - 3 =	U	x \$80.0	<i>i</i> u	\$0.00	
Multiple Dependent Clain		ABOVE CALCULAT			\$1,000.00	
Reduction of 1/2 for filing		ble. Verified Small Entity Sta			\$1,000.00	
nust also be filed (Note 3	7 CFR 1.9, 1.27, 1.28) (ch	eck if applicable).			\$0.00	
		SUB	TOTAL	=	\$1,000.00	
Processing fee of \$130.00	for furnishing the English	translation later than 2	20 🗆 3			
nonths from the earliest cl	aimed priority date (37 C			+	\$0.00	
3.11.		TOTAL NATIONA		=	\$1,000.00	
Fee for recording the enclor accompanied by an approp	osed assignment (37 CFR 1 oriate cover sheet (37 CFR	.21(h)). The assignment must 3.28, 3.31) (check if applicab	be le).	×	\$40.00	
		TOTAL FEES ENCL	LOSED	=	\$1,040.00	
					Amount to be: refunded	\$
				0	charged	\$
	Deposit Account No. of this sheet is enclosed.	to cover the above fees is ending 19-4675 in the amount of		0	to cover the abov	re fees.
to Deposit Accoun	nt No. 19-4675 priate time limit under 3	harge any fees which may be re A duplicate copy of this sheet i 7 CFR 1.494 or 1.495 has not re the application to pending s	is enclosed.			₹
SEND ALL CORRESPON	IDENCE TO:			1		
STRIKER, STRIKER &	z STENBY					
103 EAST NECK ROAI)		SIGNAT	V RE		
	HUNTINGTON, NEW YORK 11743 MICHAEL .			EL.I	STRIKER	
	YORK 11743	1	MICHA		·SIKIKEK	
	YORK 11/43		NAME		· STRIKER	
	YORK 11743				· STRIKER	
	YORK 11/43		NAME 27233		ON NUMBER	
	YORK 11/43		NAME 27233	RATIO	ON NUMBER	

UNITED STATES PATENT AND TRADEMARK OFFICE

Examiner:

Group:

Attorney Docket # 1504

Applicant(s): KIRCHER, J.

Serial No. :

Filed

: Simultaneously

For

: METHOD FOR CONSTRUCTING A DATA CONNECTION BETWEEN AN INTEGRATED

HOUSEHOLD CONTROL SYSTEM ...

SIMULTANEOUS AMENDMENT

March 29, 2001

Honorable Commissioner of Patents and Trademarks Washington, D.C. 20231

SIRS:

Simultaneously with filing of the above identified application please amend the same as follows:

In the Claims:

Cancel all claims without prejudice.

Substitute the claims attached hereto.

REMARKS:

This Amendment is submitted simultaneously with filing of the above identified application.

With the present Amendment applicant has amended the claims so as to eliminate their multiple dependency.

Consideration and allowance of the present application is most respectfully requested.

Respectfully submitted,

Michael J. Striker Attorney for Applicant(s) Reg. No. 27233

Claims

1. A method for constructing a data connection between an integrated household control system (1) and a data terminal (2) located outside the base of the integrated household control system,

characterized in that

- the data terminal (11) is mobile and is coupled with a likewise mobile position determining device (14), and
- the data terminal (11) is controlled by the position determining device (14) in such a way that if the distance from the household control base drops to a predetermined limit value, or if one reaches a predetermined region surrounding the household control base, the construction of the data connection with the integrated household control system (1) is automatically initiated via a mobile interface (18) of the data terminal.
- 2. The method of claim 1, characterized in that the data connection between the data terminal (11) and the integrated household control system (1) is constructed via a mobile radio network.
- 3. The method of claim 1, characterized in that the data connection between the data terminal (11) and the integrated household control system (1) is constructed via the internet.

- 4. The method of claim 1, characterized in that for data traffic which trips an alarm in the data terminal (11), a data connection with the data terminal (11) is constructed beginning at the integrated household control system (1), unless a data connection already exists in the opposite direction.
- 5. The method of claim 1, characterized in that the mobile data terminal (11) is disposed in a motor vehicle (10).
- 6. The method of claim 1, characterized in that a computer serves as the data terminal (11).
- 7. The method of claim 5, characterized in that the computer also serves to control motor vehicle functions.
- 8. The method of claim 1, characterized in that an internet telephone serves as the data terminal (11).
- 9. The method of claim 1, characterized in that at least one component of a mobile navigation device (15) serves as the position determining device (14).
- 10. The method of claim 1, characterized in that at least one component of a mobile station of a mobile radio system serves as the position determining device (14).
- 11. The method of claim 1, characterized in that if the distance between the mobile data terminal (11) and the household control base drops to the predetermined limit value, or if a predetermined region surrounding the household control base is

5

predetermined region surrounding the household control base is reached, the home page of the integrated household control system (1) is automatically started by a browser (12) that belongs to the data terminal (11).

- 12. A data terminal for remote control of an integrated household control system, characterized in that
- the data terminal (11) is mobile and is coupled with a mobile position determining device (14), which has an evaluator which if the distance from the household control base drops to a predetermined limit value, or if a predetermined region surrounding the household control base is reached, automatically outputs a control signal, and
- the data terminal (11) has an initiating device (13), which upon reception of the control signal initiates the construction of a data connection with the integrated household control system (1).
- 13. The data terminal of claim 12, characterized in that as its initiation device (13), it has a browser (12), which can be started by the control signal and is provided for the automatic construction of a data connection with an integrated household control system (1) via the internet.
- 14. The data terminal of claim 12, characterized in that as its initiation device (13), it has a mobile station in a mobile radio network.

- 15. The data terminal of claim 12, characterized in that as its initiation device (13), it has a mobile internet telephone.
- 16. The data terminal of claim 12, characterized in that the position determining device (14) has at least one component of a mobile navigation device (15).
- 17. The data terminal of claim 12, characterized in that the position determining device (14) has at least one component of a mobile station of a mobile radio system.

Claims

1. A method for constructing a data connection between an integrated household control system (1) and a data terminal (2) located outside the base of the integrated household control system,

characterized in that

- the data terminal (11) is mobile and is coupled with a likewise mobile position determining device (14), and
- the data terminal (11) is controlled by the position determining device (14) in such a way that if the distance from the household control base drops to a predetermined limit value, or if one reaches a predetermined region surrounding the household control base, the construction of the data connection with the integrated household control system (1) is automatically initiated via a mobile interface (18) of the data terminal.
- 2. The method of claim 1, characterized in that the data connection between the data terminal (11) and the integrated household control system (1) is constructed via a mobile radio network.
- 3. The method of claim 1 [or 2], characterized in that the data connection between the data terminal (11) and the integrated household control system (1) is constructed via the internet.

- 4. The method of [one of claims 1-3] <u>claim 1</u>, characterized in that for data traffic which trips an alarm in the data terminal (11), a data connection with the data terminal (11) is constructed beginning at the integrated household control system (1), unless a data connection already exists in the opposite direction.
- 5. The method of [one of the foregoing claims] claim 1, characterized in that the mobile data terminal (11) is disposed in a motor vehicle (10).
- 6. The method of [one of the foregoing claims] <u>claim 1</u>, characterized in that a computer serves as the data terminal (11).
- 7. The method of [claims 5 and 6] <u>claim 5</u>, characterized in that the computer also serves to control motor vehicle functions.
- 8. The method of [one of claims 1, 3 and 4-7] <u>claim 1</u>, characterized in that an internet telephone serves as the data terminal (11).
- 9. The method of [one of the foregoing claims] claim 1, characterized in that at least one component of a mobile navigation device (15) serves as the position determining device (14).
- 10. The method of [one of the foregoing claims] claim 1, characterized in that at least one component of a mobile station

5

of a mobile radio system serves as the position determining device (14).

- 11. The method of [claims 1, 2 and 4-10] claim 1, characterized in that if the distance between the mobile data terminal (11) and the household control base drops to the predetermined limit value, or if a predetermined region surrounding the household control base is reached, the home page of the integrated household control system (1) is automatically started by a browser (12) that belongs to the data terminal (11).
- 12. A data terminal for remote control of an integrated household control system, characterized in that
- the data terminal (11) is mobile and is coupled with a mobile position determining device (14), which has an evaluator which if the distance from the household control base drops to a predetermined limit value, or if a predetermined region surrounding the household control base is reached, automatically outputs a control signal, and
- the data terminal (11) has an initiating device (13), which upon reception of the control signal initiates the construction of a data connection with the integrated household control system (1).
- 13. The data terminal of claim 12, characterized in that as its initiation device (13), it has a browser (12), which can be started by the control signal and is provided for the automatic construction of a data connection with an integrated

5 household control system (1) via the internet.

- 14. The data terminal of claim 12, characterized in that as its initiation device (13), it has a mobile station in a mobile radio network.
- 15. The data terminal of claim 12, characterized in that as its initiation device (13), it has a mobile internet telephone.
- 16. The data terminal of [one of claims 12, 13 and 15] claim 12, characterized in that the position determining device (14) has at least one component of a mobile navigation device (15).
- 17. The data terminal of [one of claims 12 or 14] claim 12, characterized in that the position determining device (14) has at least one component of a mobile station of a mobile radio system.

March 28, 2001

DECLARATION

The undersigned, Jan McLin Clayberg, having an office at 5316 Little Falls Road, Arlington, VA 22207-1522, hereby states that she is well acquainted with both the English and German languages and that the attached is a true translation to the best of her knowledge and ability of International Patent Application PCT/DE 99/03014 of KIRCHER, J., entitled "METHOD FOR CONSTRUCTING A DATA CONNECTION BETWEEN AN INTEGRATED HOUSEHOLD CONTROL SYSTEM AND A DATA TERMINAL, AND DATA TERMINAL FOR REMOTE CONTROL OF AN INTEGRATED HOUSEHOLD CONTROL SYSTEM".

The undersigned further declares that the above statement is true; and further, that this statement was made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or document or any patent resulting therefrom.

Jan McLin Clayberg

1/PRTS

JC08 Rec's PCT/PTO 2 9 MAR 2001

METHOD FOR CONSTRUCTING A DATA CONNECTION BETWEEN AN INTEGRATED HOUSEHOLD CONTROL SYSTEM AND A DATA TERMINAL, AND DATA TERMINAL FOR REMOTE CONTROL OF AN INTEGRATED HOUSEHOLD CONTROL SYSTEM

Prior Art

5

And that the time that

2:0

25

The invention is based on the generic types defined by the preambles to independent claims 1 and 12.

An integrated household control system combines technical functions and applications in the household. These include for instance security technology; controlling the heating, ventilation and air conditioning; controlling the lights and window shades; and load management. As household appliances and other technical equipment are integrated in the household, the integrated household control system undergoes progressive expansion. This includes controlling the stove, washing machine, shutters, and garage door; remote reading of the gas or water meter, for instance; and so forth. The integrated household control system is designed as a system that covers both equipment and applications and that integrates all the individual components and applications present in the house or apartment into one system. The data exchange between sensors, actuators and a central station is done over the so-called European Installation Bus (EIB) of the European Installation Bus Association (EIBA), of which the leading European electrical installation companies are members.

From the on-line edition of the daily newspaper

. 4

25

30

5

10

Die Welt (with a copyright note dated November 6, 1997), under the headline "Das Internet steuert den digitalen Herd" [The Internet Controls the Digital Stove], it has become known that inhabitants of a house can set up their own individual household program and manage it, guided by a dialogue, by typing on the screen using a so-called home assistant made up of a PC and software. Looking toward the 21st century, this raises the concept that a "stuck washing machine cycle" can easily be repaired by customer service on-line using a telephone network, or that the Sunday roast can be prepared fully automatically in the digital stove using recipe software from the internet.

The "Gira HomeServer" for the "Gira Instabus System" has been announced on the market. The "HomeServer" can be controlled in a house using a cordless phone. However, it can also be operated from outside, specifically from a mobile phone and/or worldwide from a PC using a modem.

With the "Easylon WebServer Software" from Gesytec GmbH, Aachen, Germany (www.gesytec.de), it is possible to perform remote control, remote maintenance, remote display, and remote monitoring via the internet and the intranet.

According to the Handelsblatt [Commercial Gazette] of November 20, 1997, page 41, a motor vehicle is in development that has its own internet address - practically a rolling PC - in which the connection to the internet is done in one transmission direction ("downstream") via satellite, and in the other direction ("upstream") via mobile radio. Satellite positioning

5

with a built-in GPS system is also contemplated.

According to Elektronik [Electronics] 22/1997, page 24, for the many applications both known and new in an automobile, the idea has also arisen in this connection of using only a single processor, instead of isolated applications on different platforms.

Advantages of the Invention

The subject of the application as defined by the characteristics of claim 1 and claim 12 has the following advantage:

With the method and the data terminal of the invention, an inhabitant of a house with household control technology is enabled to have household control functions tripped automatically as soon as he approaches the house. Especially if a motor vehicle-based computer that has an internet connection is provided with a navigation device or at least with a position determining device, the control software for the household control can be started automatically upon an approach to the house to be controlled.

This can be done in such a way that a web browser is automatically started with the household control home page. However, it can also be achieved by simple triggering using a telephone modem.

Advantageous refinements are defined by the dependent claims, the characteristics of which can also, where appropriate, be combined with one another.

25

10

5

Preferably, a PC (personal computer) with an internet connection, located in a motor vehicle, will be used to gain contact via the internet with the central station (control computer) of the household control, and thus to perform control operations in the house or to perform monitoring from the motor vehicle itself.

Examples of such control operations are controlling the garage door, turning on the heating, heating up a previously prepared meal, turning the lights on and off, and so forth.

Examples of monitoring operations are transmitting the alarm of an alarm system to the motor vehicle; the driver or passenger can then call the police, instead of entering the house. This enhances security in the event that an alarm has been triggered by a break-in.

Examples of status calls: Are the lights, stove and heating system turned off? Are the faucets off and windows and doors closed?

Operation of the intercom at the door.

Drawing

One exemplary embodiment of the invention is shown in the drawing and described in further detail below.

Fig. 1 schematically shows a block circuit diagram of a system that is suitable for performing the method of the invention; and

Fig. 2 is a flow chart.

Description of the Exemplary Embodiment

In Fig. 1, as a household control base, a house in which an integrated household control system 1 is located is shown. The integrated household control system essentially comprises a central entity (personal computer) 2 with a bus 3 (such as XT10 bus or an EIB), to which sensors and actuators, such as a garage door motor 4, are connected.

5

10

25

30

As the data terminal 11, a personal computer is located in a motor vehicle 10 and has a browser 12 and an initializing device 13 and a navigation device 15. The navigation device is provided with a position determining device 14.

Also connected to the data terminal 11 is a display 16 and a mobile radio module 17, by way of whose mobile interface 18 a connection can be made to a mobile radio network 100 (such as a GSM network).

The personal computer 11 furthermore, via a control unit 19, controls functions of the motor vehicle 10 (such as engine control, vehicle dynamics, and so forth).

To enable communication between the mobile data terminal 11 and the central station 2 of the integrated household control system 1, the central station 2 is connected to a telephone network 20, to which a telephone 6, for example, is also connected at the household control base. The connection between the central station 2 of the integrated household control system 1 and the telephone network 20 can be made for instance by means of a modem, or possibly also by means of a terminal adaptor or some other suitable device.

10

25

30

The telephone network 20 can be a mobile radio network (not shown) or a dedicated circuit network (as shown). The communication route between the interfaces 7 and 18 leads via an access node 21 for the internet, which is provided in the telephone network 20. Between this access node 21 and a node 22, the transmission of data takes place in the internet, or in other words in packet-oriented fashion, while a line- mediated transmission takes place in the dedicated circuit network 20. From the node 22, a connection leads to a base station 23 of the same mobile radio network that the mobile interface 18 is part of.

It is characteristic for the embodiment of the invention in accordance with the exemplary embodiment that the transmission of data (such as alarm data) from the integrated household control system 1 to the mobile data terminal 11 can possibly take place over the same lines and wireless connections as a dial-up connection, but some of the distance is overcome with a packet-oriented transmission method that follows the internet protocol, instead of using a line-conducted (exclusive) transmission method.

The connection thus made between the data terminal 11 in the motor vehicle 10 and the integrated household control system 1 can now be used to control household appliances from the motor vehicle, and in particular to turn them on or off. This requires merely that an internet connection with the central entity 2 of the integrated household control system 1, or with a specific household appliance, be made via the browser located on the mobile data terminal 11. The operation can be done via suitable home pages or other kinds of

human-machine interfaces.

In this way, the garage door can for instance be opened, or the heating system can be turned on. However, it is also possible to trip closed-loop control operations, such as lowering the temperature in the house in case one had forgotten to do so upon leaving the house. Finally, status calls are also possible, for instance for whether the shutters are in fact closed.

The packet-oriented method has some advantages that prove especially desirable in the motor vehicle: There are cost advantages, which are especially great if the dial-up nodes for both the central station 2 of the integrated household control system 1 and for the mobile data terminal 11 can be reached at local calling rates. Furthermore, because of the packet-oriented mode of transmission, more than one internet connection can be maintained via a single dial-up connection. This makes it possible on the one hand to maintain contact simultaneously with a plurality of integrated household control systems, or with a plurality of appliances within one integrated household control system, from the motor vehicle itself. However, it is also possible to maintain not only the active internet connection with the integrated household control system but a simultaneous active internet telephone connection.

Fig. 2 shows the sequence of an automated remote-control operation, in which the position determining device 14 shown in Fig. 1 trips the initializing device 13 as soon as the distance of the motor vehicle 10 from the household control base, as the vehicle returns home, has dropped to a limit value for instance of 500 meters.

30

25

5

10

iii. iiii

This starts up the initializing device 13, and the personal computer of the mobile data terminal 11 with the aid of the browser 12 constructs a connection with the integrated household control system 1 and shows its home page on the display 16 (block 31).

The driver of the motor vehicle 10 thereupon selects the command "open the garage door" from a menu (block 32).

Corresponding remote control data are now transmitted by the internet protocol to the base station 23, the node 22, and the access node 21 via the GSM network, and finally to the modem 7 and the central entity 2 via the telephone network 20 (block 33).

In accordance with the remote control data received, the garage door is opened (block 34).

Possibilities for Modification

5

10

20

25

While in the example of Fig. 2 the impetus for the construction of the connection between the integrated household control system 1 and the mobile data terminal 11 comes from the data terminal, it is also possible, and specifically for data traffic that trips an alarm in the data terminal 11, for a data connection to be constructed from the integrated household control system, via the internet, unless a data connection that has been constructed in the opposite direction already

10

In a departure from Fig. 1, the position determining device 14 and/or the mobile radio modem 17 each make joint use of at least one component of a mobile station of a mobile radio system.

The internet connection between the components 21 and 22 can also be replaced by a dedicated circuit network and in particular a dedicated telephone circuit network connection, so that the dedicated telephone circuit network 20 extends as far as the base station 23.

Finally, the invention is not limited to the capability of transmitting the data between the central station 2 and the data terminal 11 in one of the two directions by the internet protocol. On the contrary, line-mediated connections or mobile radio connections in one or both directions can be used.

1. A method for constructing a data connection between an integrated household control system (1) and a data terminal (2) located outside the base of the integrated household control system,

characterized in that

- the data terminal (11) is mobile and is coupled with a likewise mobile position determining device (14), and
- the data terminal (11) is controlled by the position determining device (14) in such a way that if the distance from the household control base drops to a predetermined limit value, or if one reaches a predetermined region surrounding the household control base, the construction of the data connection with the integrated household control system (1) is automatically initiated via a mobile interface (18) of the data terminal.
- 2. The method of claim 1, characterized in that the data connection between the data terminal (11) and the integrated household control system (1) is constructed via a mobile radio network.
- 3. The method of claim 1 or 2, characterized in that the data connection between the data terminal (11) and the integrated household control system (1) is constructed via the internet.

- 4. The method of one of claims 1-3, characterized in that for data traffic which trips an alarm in the data terminal (11), a data connection with the data terminal (11) is constructed beginning at the integrated household control system (1), unless a data connection already exists in the opposite direction.
- 5. The method of one of the foregoing claims, characterized in that the mobile data terminal (11) is disposed in a motor vehicle (10).
- 6. The method of one of the foregoing claims, characterized in that a computer serves as the data terminal (11).
- 7. The method of claims 5 and 6, characterized in that the computer also serves to control motor vehicle functions.
- 8. The method of one of claims 1, 3 and 4-7, characterized in that an internet telephone serves as the data terminal (11).
- 9. The method of one of the foregoing claims, characterized in that at least one component of a mobile navigation device (15) serves as the position determining device (14).
- 10. The method of one of the foregoing claims, characterized in that at least one component of a mobile station of a mobile radio system serves as the position determining device (14).
 - 11. The method of claims 1, 2 and 4-10,


5


characterized in that if the distance between the mobile data terminal (11) and the household control base drops to the predetermined limit value, or if a predetermined region surrounding the household control base is reached, the home page of the integrated household control system (1) is automatically started by a browser (12) that belongs to the data terminal (11).

- 12. A data terminal for remote control of an integrated household control system, characterized in that
- the data terminal (11) is mobile and is coupled with a mobile position determining device (14), which has an evaluator which if the distance from the household control base drops to a predetermined limit value, or if a predetermined region surrounding the household control base is reached, automatically outputs a control signal, and
- the data terminal (11) has an initiating device (13), which upon reception of the control signal initiates the construction of a data connection with the integrated household control system (1).
- 13. The data terminal of claim 12, characterized in that as its initiation device (13), it has a browser (12), which can be started by the control signal and is provided for the automatic construction of a data connection with an integrated household control system (1) via the internet.
- 14. The data terminal of claim 12, characterized in that as its initiation device (13), it has a mobile

station in a mobile radio network.

- 15. The data terminal of claim 12, characterized in that as its initiation device (13), it has a mobile internet telephone.
- 16. The data terminal of one of claims 12, 13 and 15, characterized in that the position determining device (14) has at least one component of a mobile navigation device (15).
- 17. The data terminal of one of claims 12 or 14, characterized in that the position determining device (14) has at least one component of a mobile station of a mobile radio system.

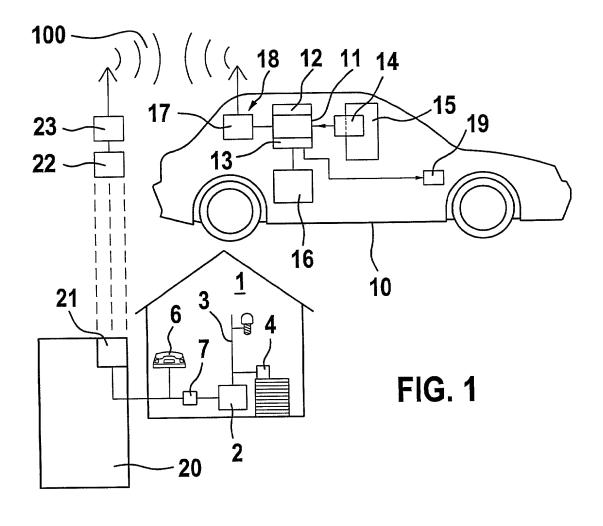



DECLARATION AND POWER OF ATTORNEY FOR NATIONAL STAGE OF PCT PATENT APPLICATION

As a below-named inventor, I hereby declare that:

Jens KIRCHER

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled METHOD FOR CONSTRUCTING A DATA CONNECTION BETWEEN AN INTEGRATED HOUSEHOLD CONTROL SYSTEM AND A DATA TERMINAL, AND DATA TERMINAL FOR REMOTE CONTROL OF AN INTEGRATED HOUSEHOLD CONTROL SYSTEM the specification of which was filed as PCT International Application number PCT/DE 99/03014 on September 28, 1999.

I hereby state that I believe the named inventor or inventors in this Declaration to be the original and first inventor or inventors of the subject matter which is claimed and for which a patent is sought.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365 (b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior	foreign	app	lication(S	١:
	TO LOUGHT	MMM	11001112111	_	,,

Priority claimed:

198 49 194.8	GERMANY	OCTOBER 26, 1998	X	No
(Number)	(Country)	(Date filed)	Yes	
(Number)	(Country)	(Date filed)	Yes	No

As a named inventor, I hereby appoint the following attorney to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Michael J. Striker, Reg. No. 27233

Direct all telephone calls to Striker, Striker & Stenby at telephone no.: (631) 549 4700 and address and all correspondence to:

STRIKER, STRIKER & STENBY 103 East Neck Road Huntington, New York 11743 U.S.A.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment,

or both, under Section 1001 of Title 18 of the United States Code and that such wilful false statement may jeopardize the var dity of the application or any patent issued thereon.

Signature:	Date:	Residence and
Jeus lutcher	17/2/01	Full Postal Address: Drosselweg 19
Full Name of First or Sole Inventor: Jens KIRCHER	Citizenship: GERMAN	D-70839 Gerlingen Germany
Signature:	Date:	Residence and Full Postal Address:
Full Name of Second Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Third Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Fourth Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Fifth Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Sixth Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Seventh Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Eighth Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Ninth Inventor:	Citizenship:	